

# SPECIFICATIONS

## WFA HiFlow Inline Water Filter System

K-T-HIFLOW

Now offers improved sediment and limescale reduction and increased capacity to over 56,000 litres per annum.

Proprietary filter head technology: **filter cartridge warranted to fit and compatible with all existing HiFlow installations.**



AS3497

Lic.WMKA22045  
IAPMO R&T OCEANA



ANSI/NSF STANDARDS  
42 AND 53



MADE IN  
USA



ASSEMBLED IN  
AUSTRALIA

WaterFilters  
AUSTRALIA

# WFA HiFlow Inline Water Filter System

K-T-HIFLOW

## SPECIFICATIONS

Capacity	56,700 litres
Service life/change cartridge	12 months*
Working Pressure	10–175psi (70–1200 kPa)
Temperature	2–38°C
Height to allow for cartridge change	460mm
Width of filter head/cartridge	225mm
Flow Rate	up to 8 litres per minute
Micron Rating	1 micron cyst rated
Burst pressure	exceeds 3,500 kPa as tested by CSIRO
Warranty	10 years

\*Service life will vary according to flow rate, influent line pressure and local water conditions.

## PERFORMANCE

Certified to remove/reduce:

- Sediment and rust particles
- Chlorine
- Bad taste and odours
- Limescale
- Cysts including Giardia and Cryptosporidium

## INCLUSIONS


- WFA Filter Head with Mounting Bracket
- Dual Check Valve
- Pex Hose 550mm 1/2" female to 3/8" male
- Brass Hex Nipple 3/8" male to 1/2" male
- Filter Alarm
- Plumbing Tape
- WFA HiFlow Cartridge
- Stabilizing Bracket
- Mounting Screws
- Owners Manual

## CARTRIDGE RE-ORDER CODE

C-T-HIFLOW

Compatible with: HIFLOW-RC

## VERTICAL OR HORIZONTAL INSTALLATION

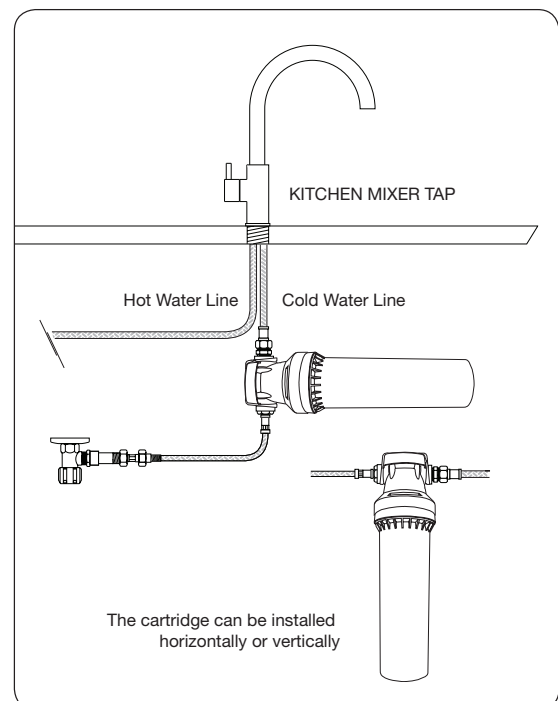

To find out more call us on 02 9905 6211  
Or if you prefer, you can email us at [sales@wfa.com.au](mailto:sales@wfa.com.au)

WaterFilters  
AUSTRALIA