


CHECK VALVES

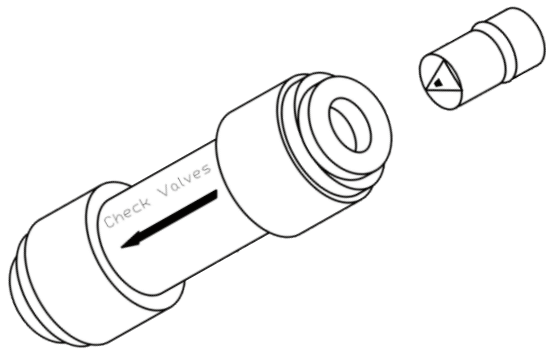

SPECIFICATIONS

Inline Check Valve with Quick Connect

Connection 1/4"

Max Operating Pressure 100 psi (8.8 kg/cm²)

Working Temperature 41 - 104°F (5 - 40°C)

MATERIAL

Body POM

Check Valve 304 Stainless Steel



WaterMark Component
(# 505/QC & 507/QC only)

SPECIFICATIONS

Elbow Check Valve with Quick Connect

Connection 1/8" M x 1/4" Tube Elbow

Max Operating Pressure 100 psi (8.8 kg/cm²)

Working Temperature 41 - 104°F (5 - 40°C)

MATERIAL

Body POM

Check Valve 304 Stainless Steel

O-Ring EPDM

(No o-ring on #505/US)

