




SPECIFICATIONS

Max operating pressure	90 psi
Working temp	2 - 40°C
Connection	1/4" quick connect
Material	POM

When a leak is detected, the compressed textile will expand and the switch lever will pop up and close off the inlet water supply.

RESETTING THE DEVICE

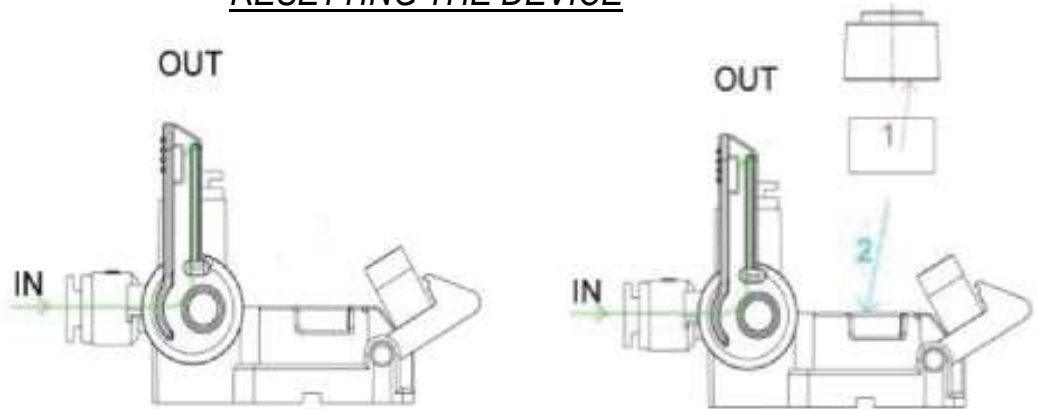

Triggered anti leak device

Remove used textile and replace with new compressed one and put cap on (Make sure surrounding is dry before putting in new compressed textile)



Push lever down and secure with latch

ANTI LEAK DEVICE