


MEMBRANE HOUSINGS

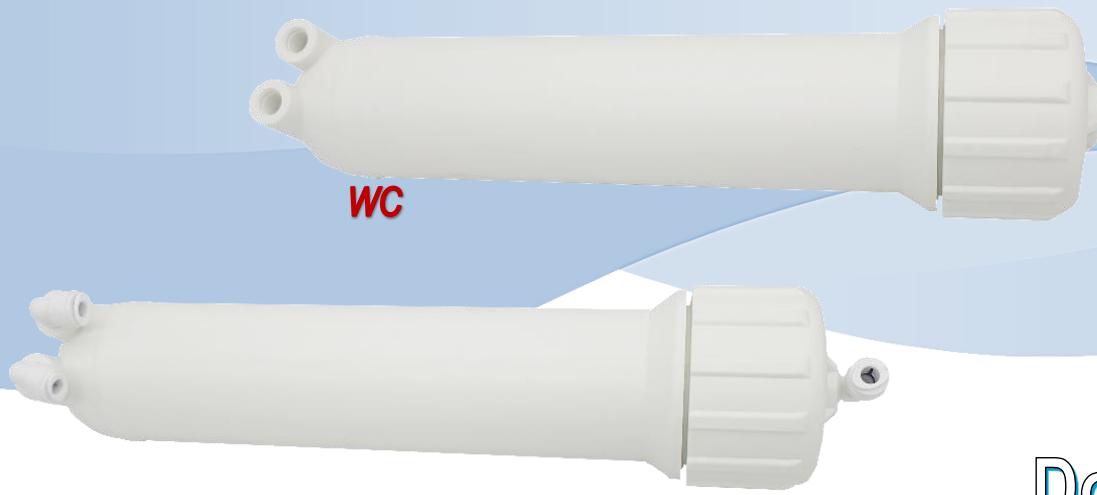


Domestic

Inlet and outlet ports are moulded directly into the body and cap of the housing via a one piece injection moulding process that requires no solvents or glues during manufacturing.

*These housings suit most standard 10" membranes such as Filmtec and CSM.
Available with or without quick connect fittings* to best suit your systems plumbing requirements.*

**Membrane housing with quick connect fittings include a check valve in the reject line.*

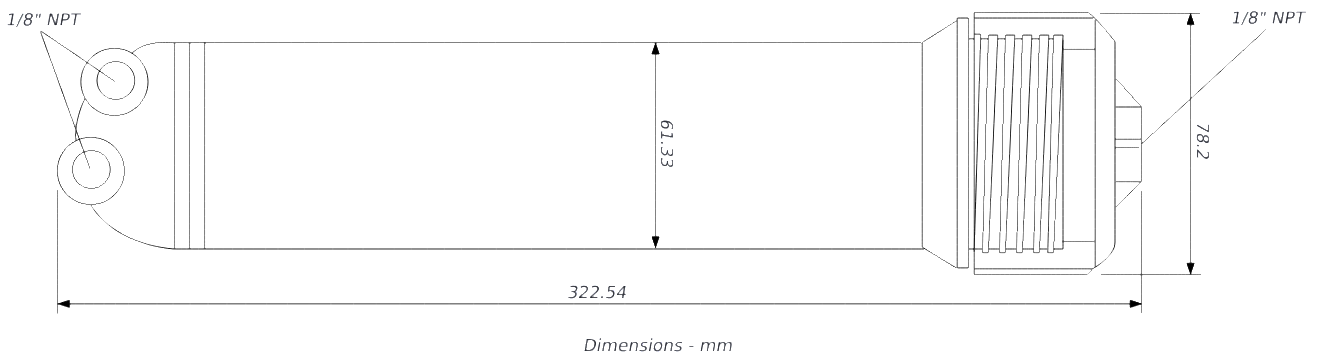

FEATURES

- Conforms to FDA Degree
- Suits most household membranes
- Polypropylene with NBR O-ring

SPECIFICATIONS

Max operating pressure	100 psi (8.8 kg/cm ²)
Max bursting pressure	400 psi (33 kg/cm ²)
Working temperature	41 - 104°F (5 - 40°C)
Ports	1/8" in/out