


HIGH PRESSURE SWITCH

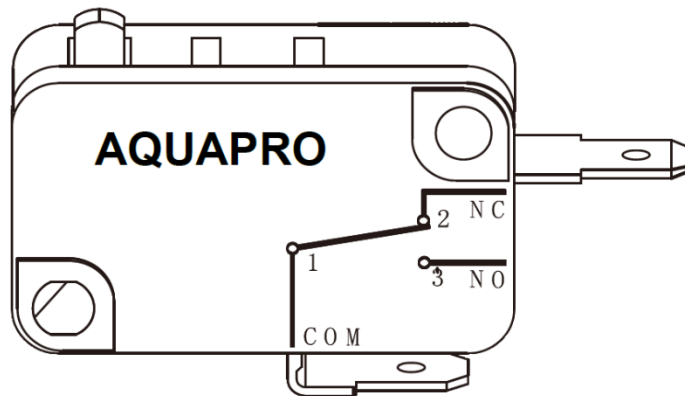

INTERNAL MICRO SWITCH

SPECIFICATIONS

Max operating pressure	120 psi (8 kg/cm ²)
Max working temperature	40°C
Connection	1/4" F in/out

MICRO SWITCH ELECTRICAL DATA

Contact resistance	50 mΩ Max (initial)
Insulation resistance	100 mΩ Min (@ 500V DC)
Dielectric strength	1000V AC (50/60 hz) for 1 min between terminals of same polarity 1500V AC (50/60 hz) for 1 min between current carrying metal part and ground (with separator), and between each terminal and non-current carrying metal parts.
Rated current & voltage	10A/250V AC