


# PRESSURE GAUGES



Dry

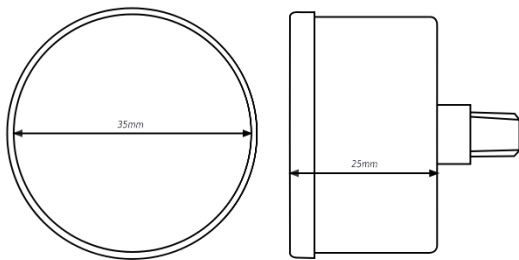

## SPECIFICATIONS

Pressure Range 0-11 bar / 0-160 psi  
 Connection 1/8"

## MATERIAL

Case Galvanized Steel with coating  
 Connector Brass  
 Front Panel Acrylic  
 Tube Phosphor Bronze

## Liquid Filled

The liquid inside the gauges works to dampen the effect of pulsation and pressure spikes. Both the vertical and horizontal liquid filled pressure gauges are suitable for non-corrosive fluid pressure movement.

Direction	Pipe Size	Face Diameter	Type	Range (PSI-KG / PSI-BAR)
Horizontal	1/4"	60 mm	Liquid filled	0-200 psi / 0-15 kg 0-200 psi / 0-15 bar 0-300 psi / 0-20 kg 0-500 psi / 0-35 kg 0-700 psi / 0-50 kg
Vertical	1/4"	60 mm	Liquid filled	0-100 psi / 0-7 kg 0-150 psi / 0-10 kg 0-200 psi / 0-15 bar 0-300 psi / 0-20 kg 0-500 psi / 0-35 kg 0-700 psi / 0-50kg

## SPECIFICATIONS

Pressure Unit PSI, KG, BAR  
 Connection 1/4"  
 Accuracy ±3% F.S. per ASME B40.1  
 Max temperature 80°C (180°F)  
 Max over pressure 20% over the graduation up to 100 bar

## MATERIAL

Case 304 grade stainless steel  
 Connector Copper alloy  
 Front Panel Acrylic