

LOW PRESSURE SWITCH





SPECIFICATIONS


UNIT: kg/cm ²						MAX WORKING PRESSURE	MAX ALLOW PRESSURE
INITIAL SETTING		ADJUST RANGE		DIFF			
OFF	ON	MIN	MAX	MIN	MAX		
3±0.2	2±0.2	1	6	1	4	15	16

ELECTRIC CONTACT CAPACITY

MOTOR RATING	POWER	125V AC	250V AC
Non-inductive Ampere	1A	10A	5A
Full load Ampere	0.75A	8.5A	4.5A

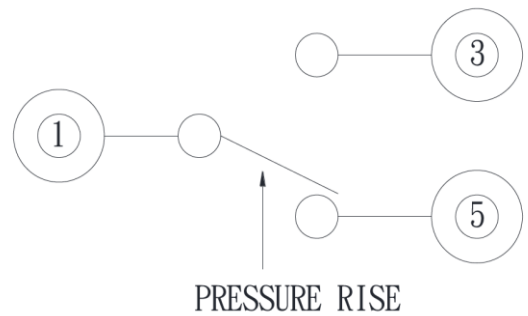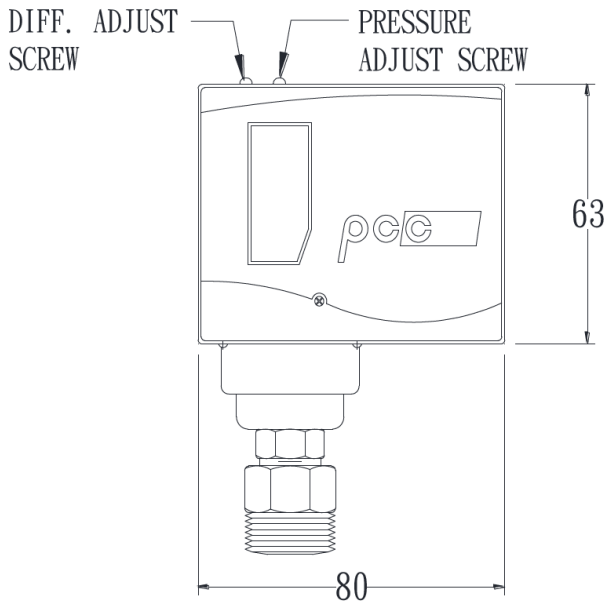

- 1 - Common terminal
- 3 - Close on, pressure decrease
- 5 - Close on, pressure increase



7/16" UNF (1/4" SAE Flare)
WITH 7/16" UNF x 3/8" PT ADAPTER

- ### FEATURES
- For use with non-corrosive refrigerant as well as with air and water
 - Allowable fluid temperature 10 - 120°C
 - Double snap-action contact mechanism ensures reliable switching
 - Type SNS for universal application
 - Mounting bracket included